

ISP120909
Bluetooth Low Energy Wireless Temperature Detection Sensor

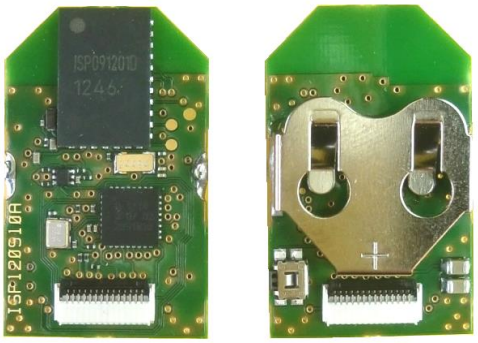

Key Features

- Single Mode BLE v4.0 Slave Module
- Based on Nordic Semiconductor uBlue family
- Includes transceiver, baseband, software stack
- Fully integrated RF matching and Antenna
- Integrated 16 MHz Crystal Clock
- Ultra Low Power Consumption
  Coin cell battery CR1632 or CR1620
- Low Power Digital Temperature Sensor
- Ultra Low Power Application Processor
- 16 MHz Crystal Clock for Application Processor
- 32.768 kHz Crystal for BLE Protocol Sync.
- Overall Size 18 x 29 x 6 mm
- Temperature -40 to 85 °C

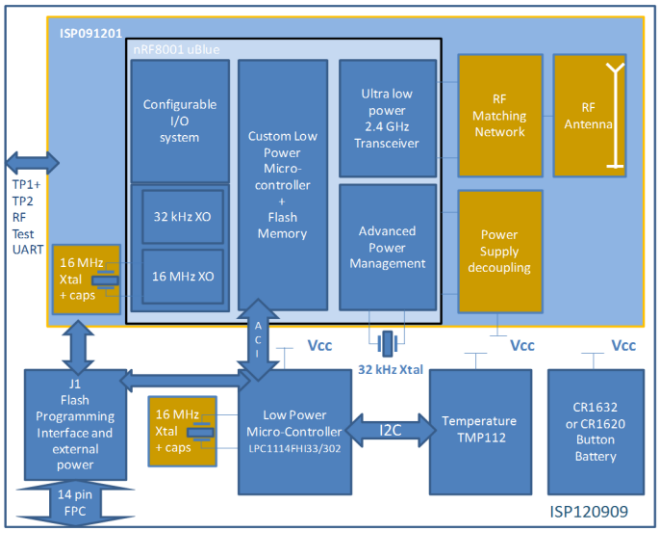

Applications

- Temperature monitoring sensors
- Thermostat controls sensors
- Health care sensors
- Out of Range (OOR) sensors

General Description

ISP120909 is an autonomous low-power device for wireless temperature detection and transmission. The complete device makes use of Insight SiP ISP091201 BLE module together with low power host processor, digital temperature sensor and small primary button cell battery CR1632 or lower capacity CR1620. Overall size of the device is 18x29x6 mm.

The host processor that handles the autonomous sensor application, the high level portion of the BLE protocol stack and communication with the temperature sensor is a low power 32-bit MCU (ARM Cortex-M0 based), the NXP LPC1114FHI33/302, integrating 56kB flash memory and 8kB SRAM.

The Texas Instruments TMP112, a digital temperature detection sensor is used to detect room temperature transmitted via the I2C bus. The TMP112 TMP112 is capable of reading temperatures to a resolution of 0.0625°C. It is specified for operation over a temperature range of -40°C to 125°C.

An interface board, ISP120907 is available from Insight SIP and allows for easy flash programming the LPC1114FHI33/302 application processor via the 14 pin FPC connector. During firmware modification and debug, the ISP120901 device may be supplied via the DC voltage from the ISP120907 interface board. An optional UART interface (TP1+TP2) with direct connection to the nRF8001 uBlue is available for BLE radio testing as specified by the Bluetooth standard.

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – **www.insightsip.com**
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

Contents

1. Electrical Specifications .....Page 2
2. RF Performances .....Page 4
3. Mechanical Outlines .....Page 4

1. Electrical Specifications

Current Consumption

The measured total average current consumption and autonomy of the ISP120909 temperature sensor node supplied by a CR1632 battery for several connection intervals is shown below.

Connection Interval (ms)	Average Current Consumption (µA)	Autonomy (year)
1000	55.1	0.29
2000	31.8	0.50
3000	24.0	0.67
4000	20.1	0.79


Sensor Performance

The performance of the temperature sensor is that obtained by the Texas Instruments TMP112. Key characteristics are shown below.

Parameter	Value	Unit
Accuracy	+/-0.0625	°C
Temperature range	-40 to +125	°C
Resolution	12	bits

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

Electrical Schematic

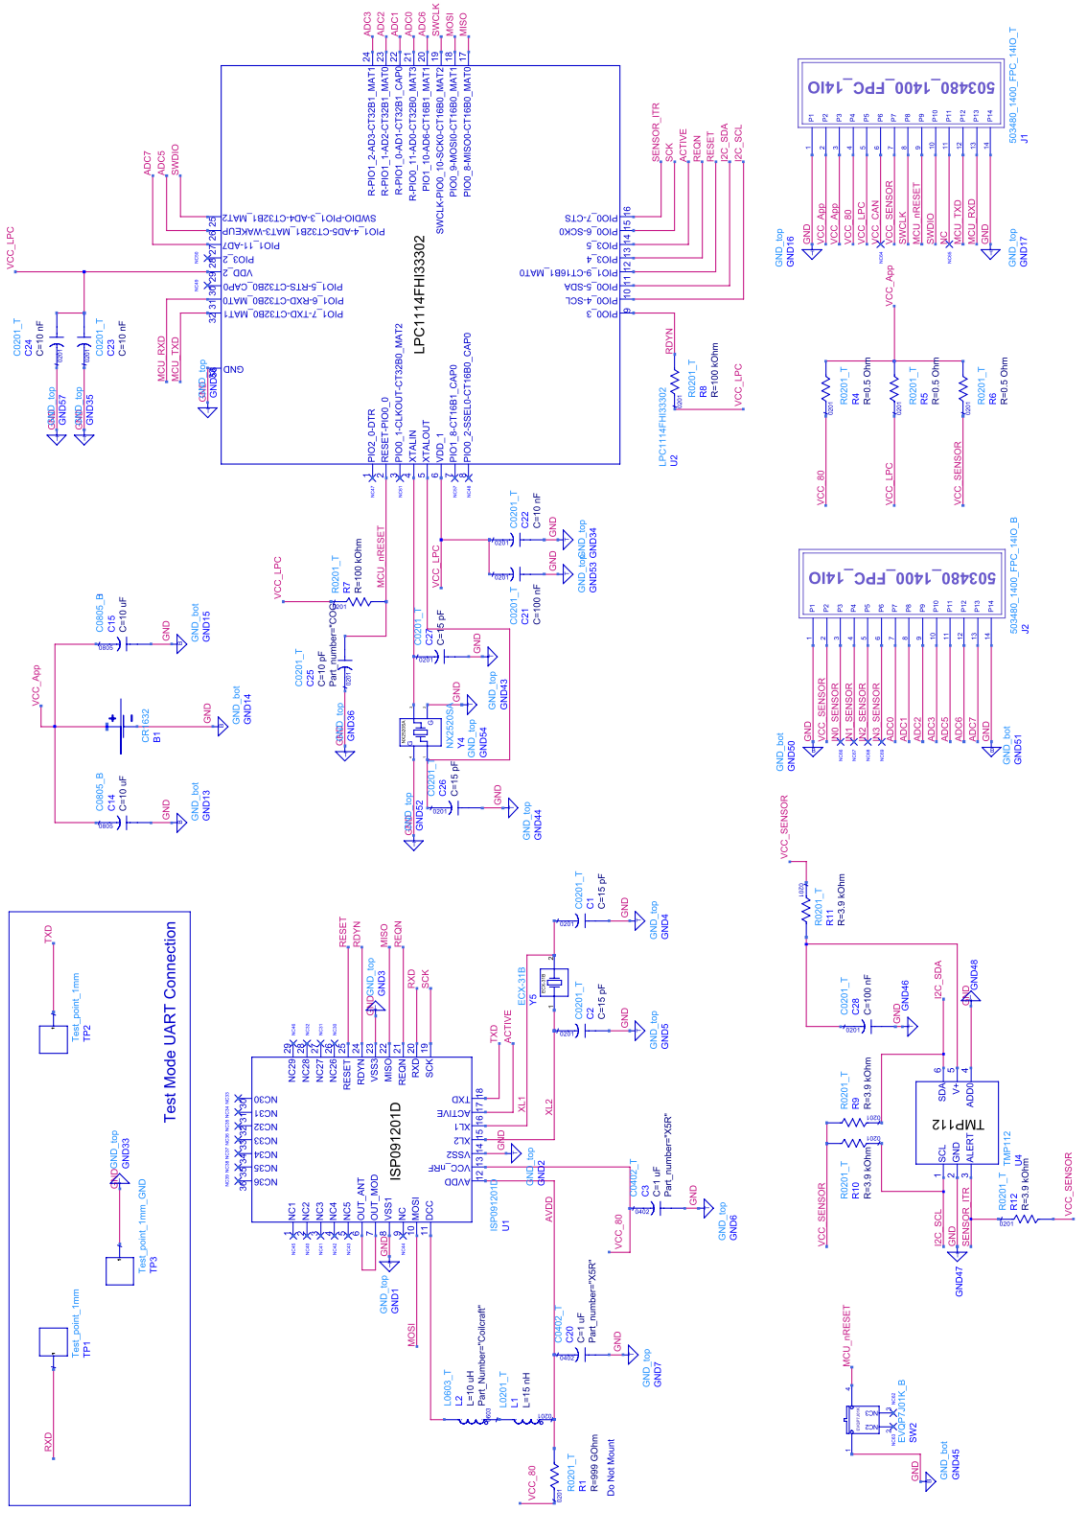

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – **www.insightsip.com**
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.

2. RF Performances


RF Specifications according to standards

The performance of the Bluetooth Low Energy Radio link is that obtained by the ISP091201 module.
Temperature range -40°C to +85°C.

Parameter	Value	BT V4 Std limit	Unit	Condition
Output Power	-0.9	-20 to 10	dBm	Channels 0 to 39
RF Frequency tolerance	Better than +/-20	+/- 50	Hz	Channel 0 to 39
Rx sensitivity	-87	-70	dBm	Level for BER <0,1% ideal Tx
Max range	> 20		m	Open field at 1m height
EIRP	0.3		dBm	
Antenna Gain	1.2		dBi	
Rx sensitivity	56.8		dBµV/m	

3. Mechanical Outlines

Dimensional drawing

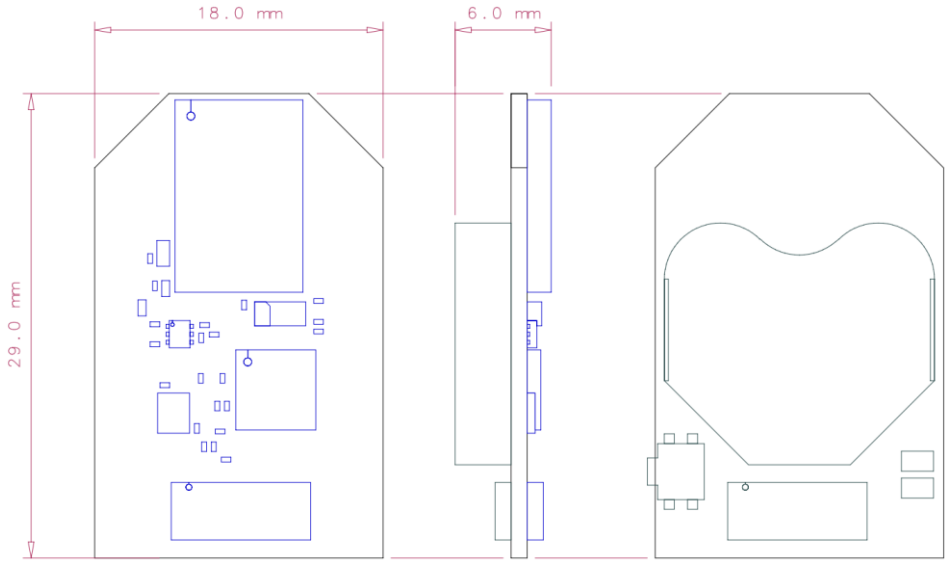

Insight SiP – Green Side – 400 avenue Roumanille – BP 309 – 06906 Sophia-Antipolis Cedex – France – www.insightsip.com
The information contained in this document is the property of Insight SiP and should not be disclosed to any third party without written permission. Specification subject to change without notice.